QPA-4000, SMP-2000, SMP-4004


NOTES:


1. ALL VALUES ARE IN OHMS, MICROHENRIES, OR MICRFARADS UNLESS OTHERWISE SPECIFIED.
2. ALL RESISTORS ARE 5%, 1/10W UNLESS OTHERWISE SPECIFIED.
3. P3 ARE PADS ONLY, FOR CONNECTION TO CABLE.

HIGHEST REFERENCE DESIGNATORS:
U2, C5, R7, J2, P3, D4

REVISIONS

REV	DESCRIPTION	CHG'D / CHK'D	DATE
A	RELEASED TO MANUFACTURING	TS	10/96
B	ECO 98005 REDRAWN IN LOGIC, ADD HIROSE INFO.	TS	3/98

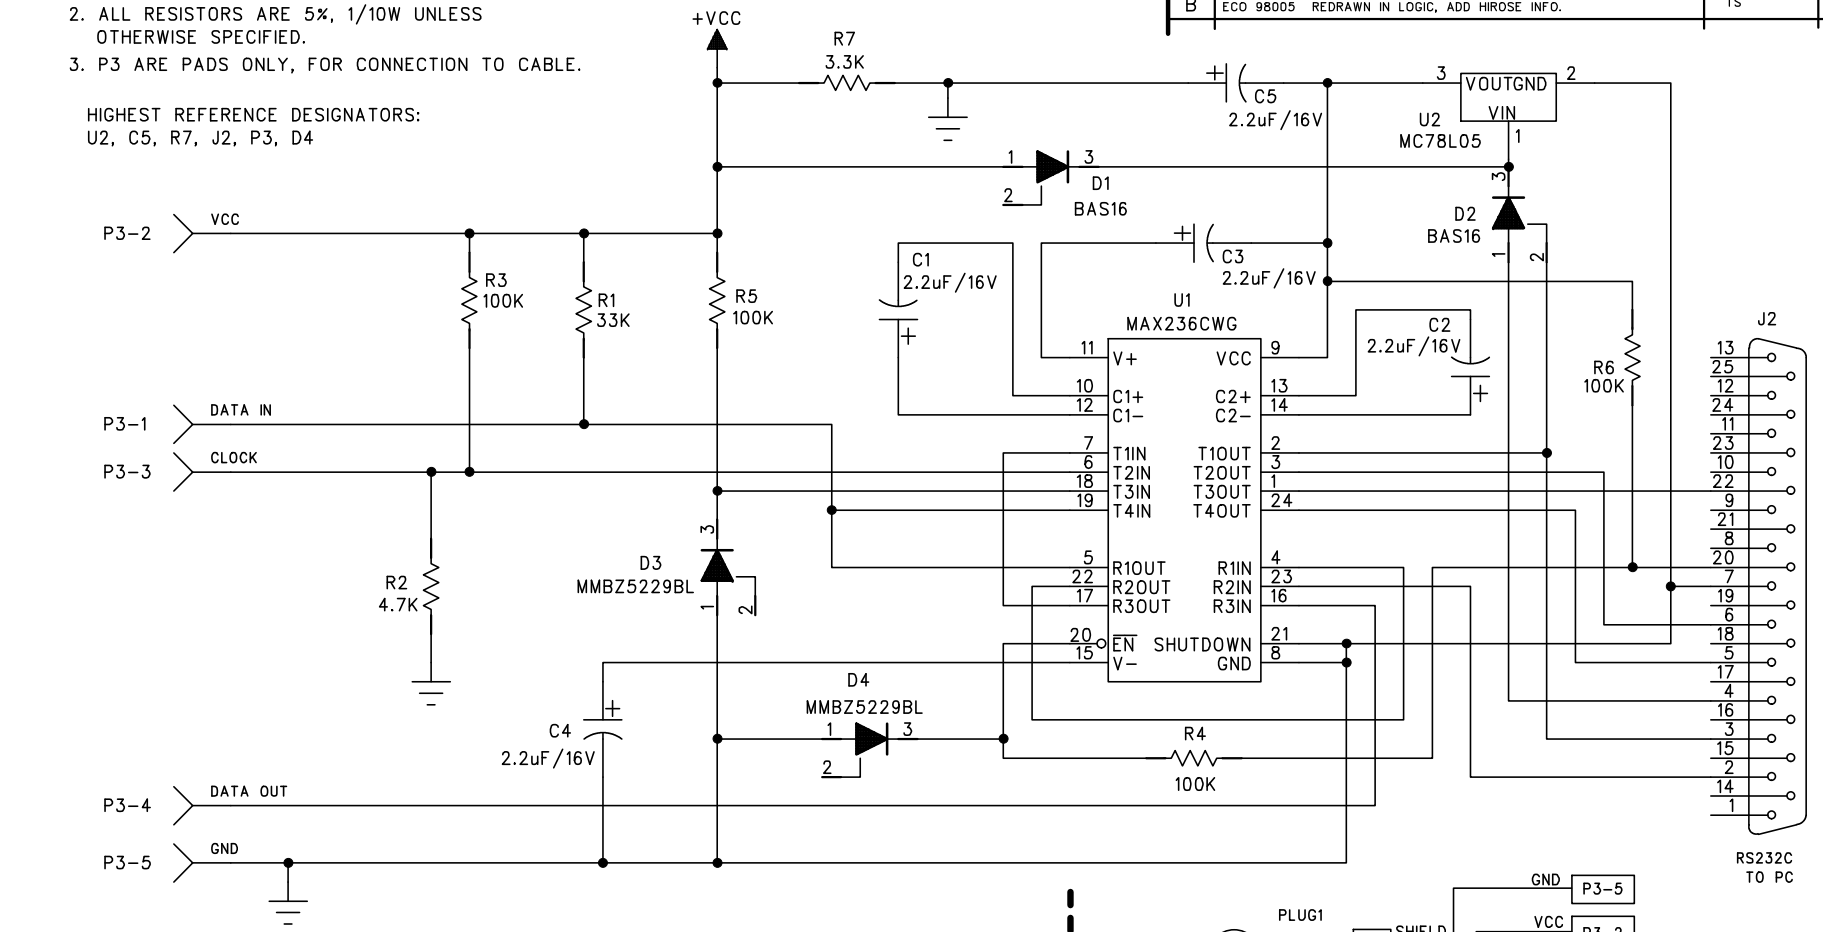


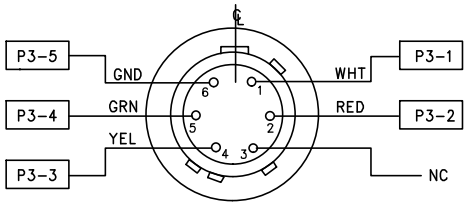

VIEWED FROM WIRE SIDE


SMP-4004 CABLE

USED WITH SP-2000 AND SL70

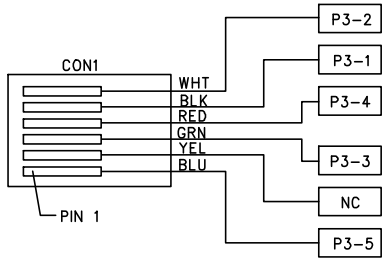

SMP-2000 CABLE

USED WITH SM-2000 AND SM-4000

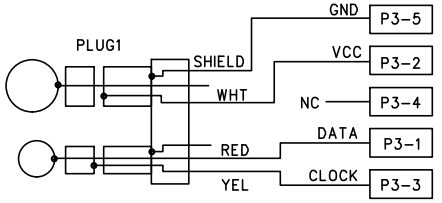

USED WITH SP120U/V, SP130/140 AND SP100U/V/H

PCB P/N: 610-160-0002
PADS FILE: P1600002.PCB
LOGIC FILE: S1600002.SCH

UNLESS OTHERWISE NOTED DIMENSIONS ARE IN MILLIMETERS
TOLERANCE:
HOLES ± | LINEAR .xx ± .XXX ± | ANGELS ±

maxon
10828 NW AIRWORLD DRIVE KCMO 64153

DWN	DATE	TITLE	RS232 GENERAL PROGRAMMING INTERFACE SCHEMATIC #2
CHK	DATE		
PROD MGR	DATE	DOCUMENT NO. 770-160-0002	SIZE A
PROJ ENG	DATE	SCALE N/A	SHEET 1 OF 1